



| | |
|-----------------------|----------------------------|
| Name | SB091 IP65 on-on 22x30mm |
| Rated Range | 16(8)A 250VAC T85/55 1E4 |
| Contact resistance | $\leq 30\text{m ONMS Max}$ |
| Insulation resistance | DC500V 100M OHMS Min |
| Compressive strength | AC1500V, 0.5MA, 5S |
| Electrical life | 10000time |
| Mechanical life | 10000time |
| Press power | 1000~1500gf |
| Operating temperature | -25°C ~ +125°C |
| Degree of protection | IP65 |
| Hypothermia | -25°C |

Weldability


$\leq 235^{\circ}\text{C}$, $\leq 3\text{S}$

Resistance to soldering heat pick

$\leq 260^{\circ}\text{C}$, $\leq 3\text{S}$

Material

PA66

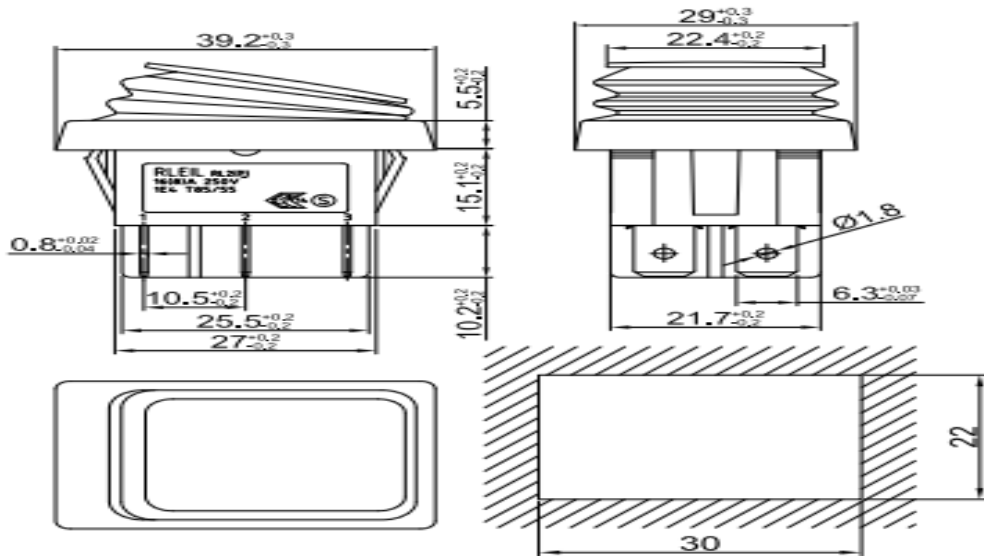

RUICHI