


Shenzhen Rui Chi electronic Co. , Ltd

ENGINEERING LABORATORY SPECIFICATION		ITEM NO	ON20130826
		(DATE)	2014/5/26
NO	Item	Specifications	Conditions
1	Part Number	Динамик d=18мм 8 Ом 1W	
2	Type	MYLAR	
3	Dimension	Φ 18×H3.6mm	
4	Voice Coil Imp	8± 15%Ohm	AT 1000 Hz 1.0 V
5	Input Power	Normal Input 0.8W	Maximum Input1W
6	Resonance FO	1200± 20% Hz	Input 1V without A baffle
7	Output SPL	90± 3 dB	AT 0.25W ON AXIS CALIBRATION ROM 0.1M MEASVRMENT CRY6125Y LABORATORY FREE FIELD AVERAGE 800,1000,1200,1500 Hz
8	Response	SPL-10dB FO ~20 K Hz MAX	
9	Polarity	When a positive D.C.current is applied to the voice coil terminal marked to The diaphragm shall move for ward	
10	Operation Test	Must be normal at program Source	1W
11	Buzz Rattle Etc	Must be normal at Sine Wave	2.53V
12	Load Test	After test meet item White noise	1.0W 96 Hours
13	Distortion	7% MAX	AT 1000 Hz 1.0W
14	(High Temperature Test)	After 55±3℃	96Hour
15	(Low Temperature Test)	After -25±3℃	96Hour
16	(Humidity Test)	After 40±3℃ 90~95% R.H.	96Hour

RUI CHI

DIMENSION:

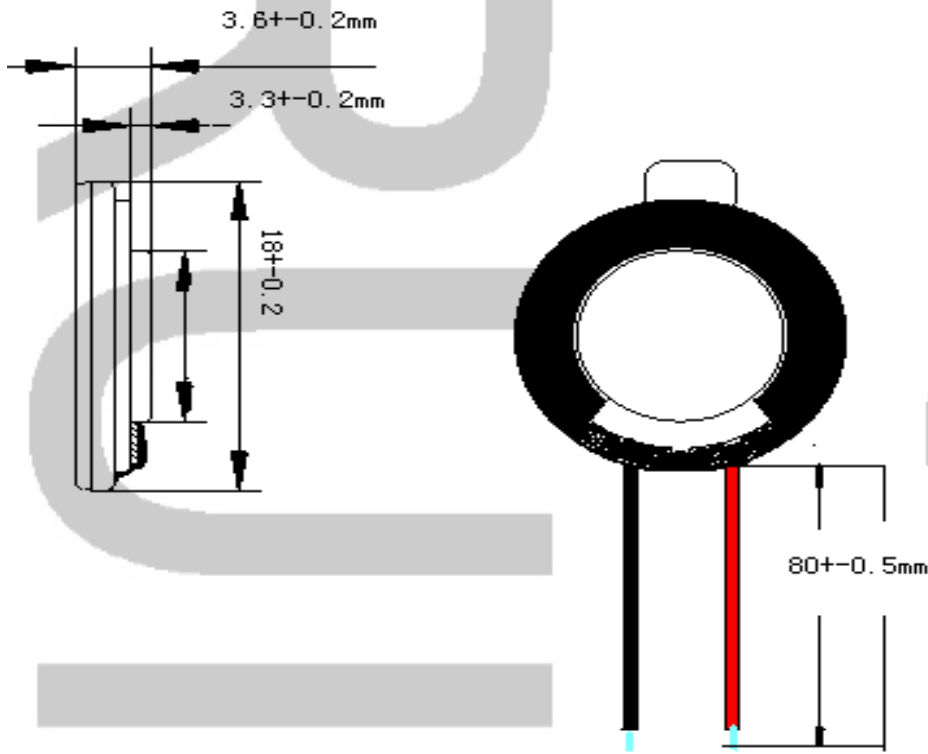


FREQUENCY RESPONSE:

08/01/2013 11:09 CRY6125Y 扬声器测试仪 V91 无框 滤波器1次

DCR= _____ Ω 1000Hz灵敏度 : 084.82 dB ACZ: _____ Ω Qm: _____
 Veq= _____ dm3 → 平均灵敏度 : 090.44 dB Zm : _____ Ω Qe: _____
 Dist.=010 cm F0 : _____ Hz Qt: _____

型号: _____ 0 dB 参考值为 : 20.0 μPa 扫频速度 : 003 ms 中速 扫频模式 : 1/12 Oct

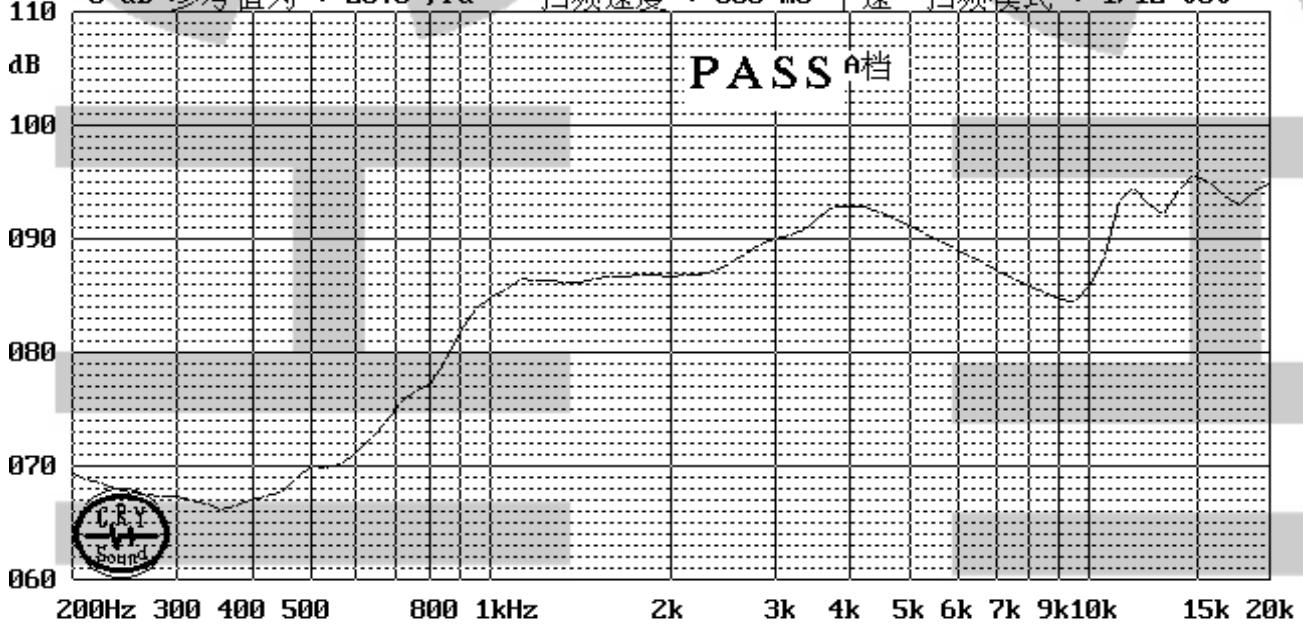

RUI CHI